



20490-20493 SERIES | FIXED TEMPERATURE THERMOSTATS


DOUBLE POLE AUTOMATIC / MANUAL RESET

Introduction

The 20490 series is a double pole single throw (DPST) fixed temperature thermostat especially designed for electric heat, laundry, and other major appliance applications. The high capacity thermostats eliminate the need for costly backup contacts and low capacity limit controls in electric heat applications.

The 20490 and 20491 are automatic reset devices. The 20492 and 20493 are manual reset and are designed for trip free operation. The trip free construction will not allow the contacts to be closed until the temperature of the disc is lowered to its reset point. Automatic and manual reset devices are available as limit (L) switches, which open on temperature rise. Automatic reset devices are also available as fan (F) switches, which close on temperature rise.

The switch is enclosed within a phenolic housing and stainless steel cup assembly which protects the contacts from contamination. The stainless steel cup also provides a variety of mounting configurations. The switch mechanism is actuated by the Klixon snap-action bimetal disc which may be enclosed or exposed. Enclosed disc types should be used in all applications where response to radiant heat is not critical as it provides protection (to the bimetal element and switch assembly) against contamination and damage due to handling. Exposed disc types are used in applications where a faster thermal response to radiant heat is required.

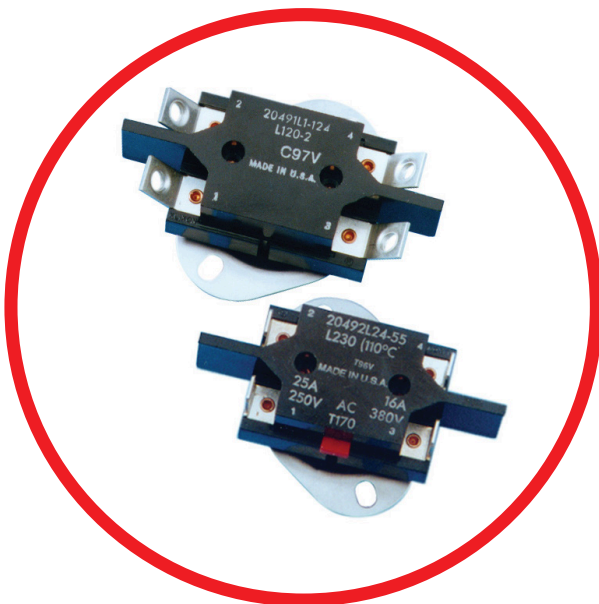

Features

- Double Pole Single Throw (DPST)
- Automatic Reset or Manual Reset/Trip Free
- Heavy Duty Capacity - up to 48 amperes per pole on 20493
- Snap-Action resists shock and vibration regardless of mounting position
- UL Recognized for USA and Canada (20490 only)
- Tamperproof – temperatures are factory set to customer requirements
- Molded Phenolic Case – UL V-0 rated material which seals out lint, dust, and other contamination
- High Reliability

Applications

- Electric heaters
- Laundry applications
- Major appliance applications

SPECIFICATIONS

Contact Operations	Automatic Reset (100K cycles) or Manual Reset/Trip Free (6K cycles)
Operating Temperature	0-300°F (Automatic Reset) and 100-300°F (Manual Reset)
Terminal Configurations	0.250" X 0.032" flat, 45°, 90° male quick connect 0.187" X 0.032" 90° male quick connect #8-32NC flat and 45° screw terminals #10-24 45° screw terminals (20493 only)


MANUAL RESET
Automatic Reset

Temperature Range (°F)	Tolerances		Nominal Temperature Differential
	Open	Close	
0 to 80	±6	±7	20 to 60
81 to 200	±5	±7	20 to 60
201 to 250	±6	±8	20 to 60
251 to 300	±7	±10	20 to 60

Manual Reset

Opening Temperature Range (°F)	Tolerances
100 to 200	±5
201 to 250	±6
251 to 300	±7

Electrical Clearances

Type	Through Air	Over Surface
20490	1/4"	3/8"
20491	3/8"	1/2"
20492	3/8"	1/2"
20493	3/8"	1/2"


ELECTRICAL RATINGS
Auto Reset

(100,000 Cycles/Pole)

20490*

Resistive	25 amperes at 240 VAC
Motor Load	10 FLA-60 LRA at 120 VAC 5 FLA-30 LRA at 240 VAC
Pilot Duty	125 volt-amperes at 120 VAC

20491*

Resistive	25 amperes at 600 VAC
Motor Load	4 FLA-8 LRA at 480 VAC
Pilot Duty	690 volt-amperes at 240 VAC to 480 VAC

Manual Reset

(6,000 Cycles/Pole)

20492*

Resistive	25 amperes at 600 VAC
Motor Load	10 FLA-60 LRA at 120 VAC 5 FLA-30 LRA at 240 VAC
Pilot Duty	690 volt-amperes at 240/600 VAC 480 volt-amperes at 120 VAC

20493*

Resistive	48 amperes at 600 VAC
Motor Load	16 FLA-96 LRA at 120 VAC 8 FLA-48 LRA at 240 VAC
Pilot Duty	690 volt-amperes at 240/600 VAC 480 volt-amperes at 120 VAC




DIMENSIONS

(All dimensions are in inches unless otherwise noted.)


20490 and 20491

Standard 0.250 wide X 0.032 thick spade type quick connect terminals

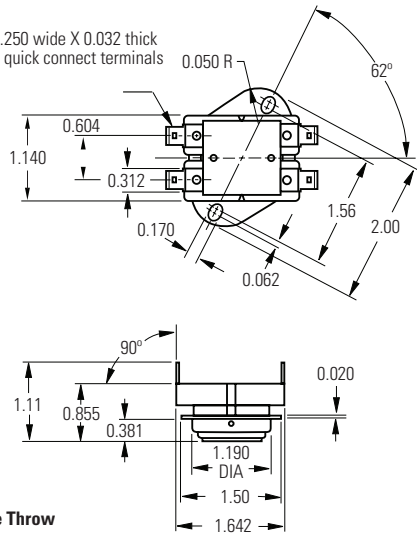

**Double Pole, Single Throw
Small Oval Flange
Top Mounting
Quick Connect Terminal**

20492 and 20493

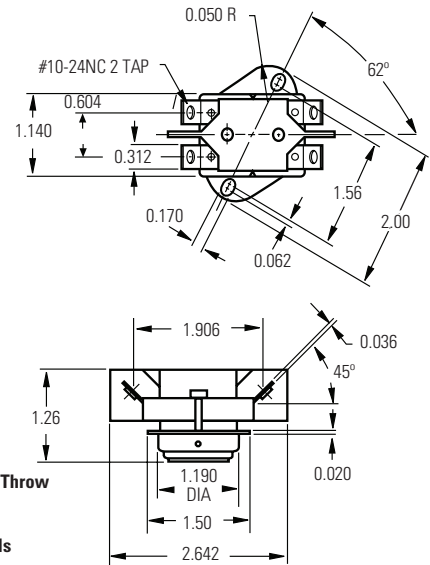

**Double Pole, Single Throw
Manual Reset
Small Oval Flange
Top Mounting
Screw Type terminals**



AGENCY APPROVALS AND CERTIFICATION



Agency	File Number
UL	MP986 (20490 only)
ENEC	2018218.02 (20490 only)

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (888) 438 2214
sensors@sensata.com

Europe, Middle East & Africa

+31 (74) 357 8156
temperature-info.eu
@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808