



# Sensata Technologies

## 7BT2 SERIES



**Neumüller**

Elektronik GmbH

Autorisierter Distributor:

**Neumüller Elektronik GmbH** | Gewerbegebiet Ost 7 | D-91085 Weisendorf  
Tel. +49 9135 73666-0 | [info@neumueller.com](mailto:info@neumueller.com) | [www.neumueller.com](http://www.neumueller.com)



## | 7BT2 SERIES

30°F to 400°F, High Capacity, ½"

### Introduction

KLIXON® 7BT series high current capacity thermostats provide customers with an environmentally sealed thermal switch capable of carrying up to 15 amps at 120VAC or 10 amps at 30 VDC. Designed around a bi-metallic disc, it provides crisp, positive switching action in a device that protects against dust and other foreign particles. KLIXON® 7BT series thermostats are often used by customers in the telecommunications, industrial, rail/transit, or medical industries to control fans or heaters for large scale electronics equipment and industrial batteries.



### Features

- High current capacity, environmentally sealed
- Normally open or normally closed
- Pre-set, non-adjustable calibration
- Max resistive load: 15 amp
- Operating temperature range: 30°F to 400°F (-1.1°C to 204.4°C)
- UL & Canadian-UL (UL File #34618)
- DEKRA (Formerly known as KEMA) (ENEC), file #2018218.03



### PERFORMANCE CHARACTERISTICS

### Characteristics

<b>Dielectric Strength</b>	1500 VAC, rms, 60 cycles for 1 minute, terminal to case			
<b>Ambient Temperature Range</b>	-40°F to +464°F (-40°C to +240°C)			
<b>Operating Temperature Range</b>	+30°F to 400°F (-1.1°C to +204.4°C)			
<b>Contact Ratings (Resistive, Max Temp 400°F, based on standard differential)</b>	<b>Cycles</b>	<b>120 VAC</b>	<b>240 VAC</b>	<b>30VDC</b>
	100,000	15.0A	7.5A	10A

## Operating Temperature Dash Number

Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
*	30	-1.1	20	11.1	5	2.8
*	40	4.4	20	11.1	5	2.8
*	50	10.0	20	11.1	5	2.8
*	60	15.6	20	11.1	5	2.8
*	70	21.1	20	11.1	5	2.8
*	80	26.7	20	11.1	5	2.8
*	90	32.2	20	11.1	5	2.8
*	100	37.8	20	11.1	5	2.8
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
*	110	43.3	20	11.1	5	2.8
1	120	48.9	20	11.1	5	2.8
2	125	51.7	20	11.1	5	2.8
3	130	54.4	20	11.1	5	2.8
4	135	57.2	20	11.1	5	2.8
5	140	60.0	20	11.1	5	2.8
6	145	62.8	20	11.1	5	2.8
7	150	65.6	20	11.1	5	2.8
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
8	155	68.3	20	11.1	5	2.8
9	160	71.1	20	11.1	5	2.8
10	165	73.9	20	11.1	5	2.8
11	170	76.7	20	11.1	5	2.8
12	175	79.4	20	11.1	5	2.8
13	180	82.2	20	11.1	5	2.8
14	185	85.0	20	11.1	5	2.8
15	190	87.8	20	11.1	5	2.8
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
16	195	90.6	20	11.1	5	2.8
17	200	93.3	20	11.1	5	2.8
40	315	157.2	20	11.1	5	2.8
18	205	96.1	30	16.7	8	4.4
19	210	98.9	30	16.7	8	4.4
20	215	101.7	30	16.7	8	4.4
21	220	104.4	30	16.7	8	4.4
22	225	107.2	30	16.7	8	4.4

## Operating Temperature Dash Number (Continued)

Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
23	230	110.0	30	16.7	8	4.4
24	235	112.8	30	16.7	8	4.4
25	240	115.6	30	16.7	8	4.4
26	245	118.3	30	16.7	8	4.4
27	250	121.1	30	16.7	8	4.4
28	255	123.9	30	16.7	8	4.4
29	260	126.7	30	16.7	8	4.4
30	265	129.4	30	16.7	8	4.4
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
31	270	132.2	30	16.7	8	4.4
32	275	135.0	30	16.7	8	4.4
33	280	137.8	30	16.7	8	4.4
34	285	140.6	30	16.7	8	4.4
35	290	143.3	30	16.7	8	4.4
36	295	146.1	30	16.7	8	4.4
37	300	148.9	30	16.7	8	4.4
38	305	151.7	30	22.2	12	6.7
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
39	310	154.4	40	22.2	12	6.7
41	320	160.0	40	22.2	12	6.7
42	325	162.8	40	22.2	12	6.7
43	330	165.6	40	22.2	12	6.7
44	335	168.3	40	22.2	12	6.7
45	340	171.1	40	22.2	12	6.7
46	345	173.9	40	22.2	12	6.7
47	350	176.7	40	22.2	12	6.7
Dash	Operating Temperature		Differential		Tolerance	
#	°F	°C	°F	°C	±°F	±°C
*	360	182.2	40	22.2	12	6.7
*	370	187.8	40	22.2	12	6.7
*	380	193.3	40	22.2	12	6.7
*	390	198.9	40	22.2	12	6.7
*	400	204.4	40	22.2	12	6.7

Consult Sensata Technologies if desired operating temperature does not appear on table.

\* Dash number does not apply. Order by operating temperature




Our most common configurations are depicted below, but many other styles are available. The 7BT2 can be custom packaged to meet your specific design requirements.

## Configuration Options

Custom configurations are available

<b>Terminals</b>	A = Solder Type, Flat
	B = 3/16 QC, outset at 90°
	C = Weld Type, Flat
	D = Weld Type, outset at 90°
	F = ¼ QC, outset at 90°
	G = ¼ QC, Flat
<b>Mounting Style</b>	2 = No Mounting
	3 = Loose Bottom Bracket
	4 = Fixed Top Flange
	6 = 6-32 x .187 stud
<b>Optional Wire Leads</b>	Standard wire is 18 gauge stranded, tinned copper wire with black 0.31" PVC insulation (600V, 105°C). UL & CSA approved wire available. Standard lengths are shown under Ordering Options section below, but other lengths are available upon request.

Below is a sample of possible mounting style configurations. Any terminal style may be matched with any mounting style.

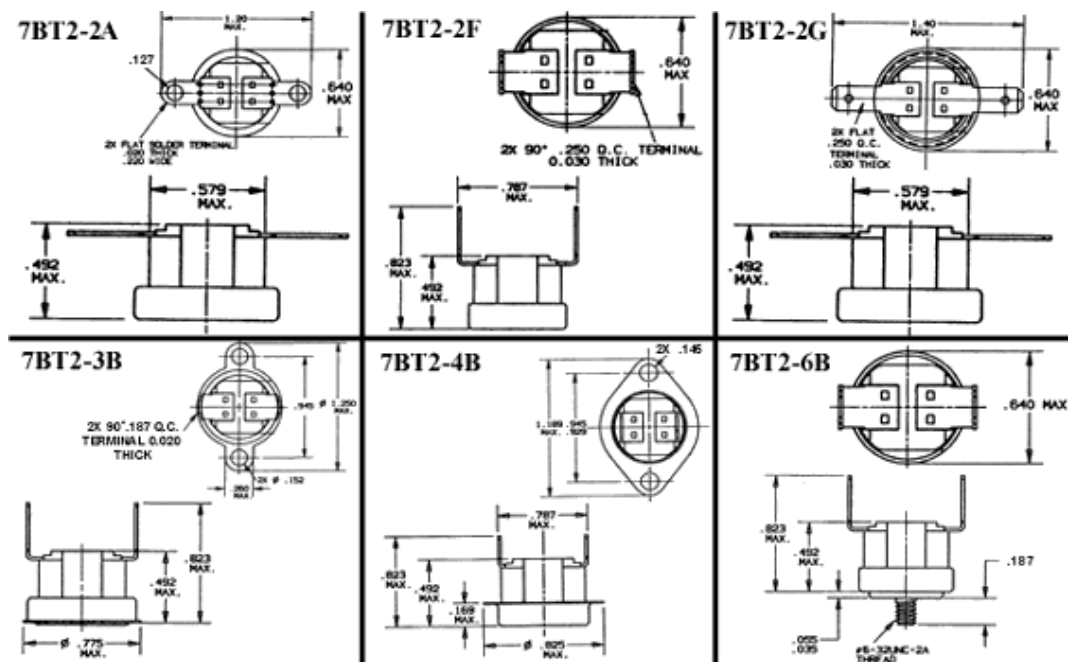



## ORDERING OPTIONS

Example : 7BT2L3D-36-2

<b>Part Series</b>	<b>7BT2</b>	<b>L</b>	<b>3</b>	<b>D</b>	<b>-</b>	<b>36</b>	<b>-</b>	<b>2</b>
<b>7BT2</b>								
<b>Contact Action</b>								
<b>L</b> = Open on rise <b>F</b> = Close on rise								
<b>Mounting Style</b>								
<b>2</b> = No Mounting <b>3</b> = Loose bottom bracket <b>4</b> = Fixed top flange <b>6</b> = 6-32x0.187 stud								
<b>Terminal Style</b>								
<b>A</b> = Solder type, flat <b>B</b> = 3/16 QC, outset at 90 degrees <b>C</b> = Weld type, flat <b>D</b> = Weld type, outset at 90 degrees <b>F</b> = 1/4 QC, outset at 90 degrees <b>G</b> = 1/4 QC, flat								
<b>Operation Temperature Dash Number</b>								
See operating temp. dash table for your specific number (other temperature settings available on request)								
<b>Wire Lead</b>								
<b>0</b> = none <b>1</b> = 6" (standard) <b>2</b> = 12" (standard) <b>3</b> = 18" (standard) <b>4</b> = 24" (standard) <b>5</b> = 30" <b>6</b> = 36" ...etc. Lengths are in increments of 6 inches								



## AGENCY APPROVALS & CERTIFICATIONS

Agency	Max. Voltage	Max. Current (Non-inductive)	Max. Temp.	Cycles
<b>UL</b>	120 VAC	10 A	400°F	30,000
<b>UL</b>	240 VAC	10 A	400°F	30,000
<b>UL</b>	277 VAC	7 A	400°F	30,000
<b>UL / UL-C</b>	120 VAC	10 A	400°F	100,000
<b>UL / UL-C</b>	240 VAC	10 A	400°F	100,000
<b>UL / UL-C</b>	277 VAC	7.2 A	400°F	100,000
<b>KEMA</b>	240 VAC	10 A	400°F	100,000



## WARNINGS

**RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE**

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

**Failure to follow these instructions can result in serious injury, or equipment damage.**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

**Failure to follow these instructions will result in death or serious injury.**

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

**CONTACT US****Americas**

+1 (508)-236-3287  
klixon@sensata.com

**AUTHORIZED DISTRIBUTORS**

Flame Enterprises  
Bob Correa, Director of Product Management  
+1 (240) 236-9802  
bcorrea@flamecorp.com  
info@flamecorp.com | Web  
Tel: 1-800-854-2255 or 1-818-700-2905  
Fax: 1-818-407-5080

Peerless Electronics  
Steve Gunther, National Sales Manager

+1 (516) 594-3509  
sgunther@peerlesselectronics.com  
nysales@peerlesselectronics.com | Web  
Tel: 1-800-285-2121  
Fax: 1-800-222-8096

**Europe, Middle East & Africa**

Flame Enterprises  
Bob Correa, Director of Product Management  
+1 (240) 236-9802  
bcorrea@flamecorp.com  
info@flamecorp.com | Web  
Tel: 1-800-854-2255 or 1-818-700-2905  
Fax: 1-818-407-5080